

SCIENTIFIC AMERICAN

The Flow of Energy in an Industrial Society

Author(s): Earl Cook

Source: *Scientific American*, Vol. 225, No. 3 (September 1971), pp. 134-147

Published by: Scientific American, a division of Nature America, Inc.

Stable URL: <http://www.jstor.org/stable/24923122>

Accessed: 19-02-2018 09:59 UTC

JSTOR is a not-for-profit service that helps scholars, researchers, and students discover, use, and build upon a wide range of content in a trusted digital archive. We use information technology and tools to increase productivity and facilitate new forms of scholarship. For more information about JSTOR, please contact support@jstor.org.

Your use of the JSTOR archive indicates your acceptance of the Terms & Conditions of Use, available at <http://about.jstor.org/terms>



JSTOR

Scientific American, a division of Nature America, Inc. is collaborating with JSTOR to digitize, preserve and extend access to *Scientific American*



The Flow of Energy in an Industrial Society

The U.S., with 6 percent of the world's population, uses 35 percent of the world's energy. In the long run the limiting factor in high levels of energy consumption will be the disposal of the waste heat

by Earl Cook

This article will describe the flow of energy through an industrial society: the U.S. Industrial societies are based on the use of power: the rate at which useful work is done. Power depends on energy, which is the ability to do work. A power-rich society consumes—more accurately, degrades—energy in large amounts. The success of an industrial society, the growth of its economy, the quality of the life of its people and its impact on other societies and on the total environment are determined in large part by the quantities and the kinds of energy resources it exploits and by the efficiency of its systems for converting potential energy into work and heat.

Whether by hunting, by farming or by burning fuel, man introduces himself into the natural energy cycle, converting energy from less desired forms to more desired ones: from grass to beef, from wood to heat, from coal to electricity. What characterizes the industrial societies is their enormous consumption of energy and the fact that this consumption is primarily at the expense of “capital” rather than of “income,” that is, at the expense of solar energy stored in coal, oil and natural gas rather than of solar radiation, water, wind and muscle power. The advanced industrial societies, the U.S. in particular, are further characterized by their increasing dependence on electricity, a trend that has direct effects on gross energy consump-

tion and indirect effects on environmental quality.

The familiar exponential curve of increasing energy consumption can be considered in terms of various stages of human development [see illustration on next page]. As long as man's energy consumption depended on the food he could eat, the rate of consumption was some 2,000 kilocalories per day; the domestication of fire may have raised it to 4,000 kilocalories. In a primitive agricultural society with some domestic animals the rate rose to perhaps 12,000 kilocalories; more advanced farming societies may have doubled that consumption. At the height of the low-technology industrial revolution, say between 1850 and 1870, per capita daily consumption reached 70,000 kilocalories in England, Germany and the U.S. The succeeding high-technology revolution was brought about by the central electric-power station and the automobile, which enable the average person to apply power in his home and on the road. Beginning shortly before 1900, per capita energy consumption in the U.S. rose at an increasing rate to the 1970 figure: about 230,000 kilocalories per day, or about 65×10^{15} British thermal units (B.t.u.) per year for the country as a whole. Today the industrial regions, with 30 percent of the world's people, consume 80 percent of the world's energy. The U.S., with 6 percent of the people, consumes 35 percent of the energy.

In the early stages of its development in western Europe industrial society based its power technology on income sources of energy, but the explosive growth of the past century and a half has been fed by the fossil fuels, which are not renewable on any time scale meaningful to man. Modern industrial society is totally dependent on high rates of consumption of natural gas, petroleum and coal. These nonrenewable fossil-fuel resources currently provide 96 percent of the gross energy input into the U.S. economy [see top illustration on page 137]. Nuclear power, which in 1970 accounted for only .3 percent of the total energy input, is also (with present reactor technology) based on a capital source of energy: uranium 235. The energy of falling water, converted to hydropower, is the only income source of energy that now makes any significant contribution to the U.S. economy, and its proportional role seems to be declining from a peak reached in 1950.

Since 1945 coal's share of the U.S. energy input has declined sharply, while both natural gas and petroleum have increased their share. The shift is reflected in import figures. Net imports of petroleum and petroleum products doubled between 1960 and 1970 and now constitute almost 30 percent of gross consumption. In 1960 there were no imports of natural gas; last year natural-gas imports (by pipeline from Canada and as liquefied gas carried in cryogenic tankers) accounted for almost 4 percent of gross consumption and were increasing.

The reasons for the shift to oil and gas are not hard to find. The conversion of railroads to diesel engines represented a large substitution of petroleum for coal. The rapid growth, beginning during World War II, of the national

HEAT DISCHARGE from a power plant on the Connecticut River at Middletown, Conn., is shown in this infrared scanning radiograph. The power plant is at upper left, its structures outlined by their heat radiation. The luminous cloud running along the left bank of the river is warm water discharged from the cooling system of the plant. The vertical oblong object at top left center is an oil tanker. The luminous spot astern is the infrared glow of its engine room. The dark streak between the tanker and the warm-water region is a breakwater. The irregular line running down the middle of the picture is an artifact of the infrared scanning system. The picture was made by HRB-Singer, Inc., for U.S. Geological Survey.

network of high-pressure gas-transmission lines greatly extended the availability of natural gas. The explosion of the U.S. automobile population, which grew twice as fast as the human population in the decade 1960–1970, and the expansion of the nation's fleet of jet aircraft account for much of the increase in petroleum consumption. In recent years the demand for cleaner air has led to the substitution of natural gas or low-sulfur residual fuel oil for high-sulfur coal in many central power plants.

An examination of energy inputs by sector of the U.S. economy rather than by source reveals that much of the recent increase has been going into household, commercial and transportation applications rather than industrial ones [see bottom illustration on opposite page]. What is most striking is the growth of the electricity sector. In 1970 almost 10 percent of the country's useful work was done by electricity. That is not the whole story. When the flow of energy from resources to end uses is


charted for 1970 [see illustration on pages 138 and 139], it is seen that producing that much electricity accounted for 26 percent of the gross consumption of energy, because of inefficiencies in generation and transmission. If electricity's portion of end-use consumption rises to about 25 percent by the year 2000, as is expected, then its generation will account for between 43 and 53 percent of the country's gross energy consumption. At that point an amount of energy equal to about half of the useful work done in the U.S. will be in the form of waste heat from power stations!

All energy conversions are more or less inefficient, of course, as the flow diagram makes clear. In the case of electricity there are losses at the power plant, in transmission and at the point of application of power; in the case of fuels consumed in end uses the loss comes at the point of use. The 1970 U.S. gross consumption of 64.6×10^{15} B.t.u. of energy (or 16.3×10^{15} kilocalories, or 19×10^{12} kilowatt-hours) ends up as

32.8×10^{15} B.t.u. of useful work and 31.8×10^{15} B.t.u. of waste heat, amounting to an overall efficiency of about 51 percent.

The flow diagram shows the pathways of the energy that drives machines, provides heat for manufacturing processes and heats, cools and lights the country. It does not represent the total energy budget because it includes neither food nor vegetable fiber, both of which bring solar energy into the economy through photosynthesis. Nor does it include environmental space heating by solar radiation, which makes life on the earth possible and would be by far the largest component of a total energy budget for any area and any society.

The minute fraction of the solar flux that is trapped and stored in plants provides each American with some 10,000 kilocalories per day of gross food production and about the same amount in the form of nonfood vegetable fiber. The fiber currently contributes little to the energy supply. The food, however, fu-

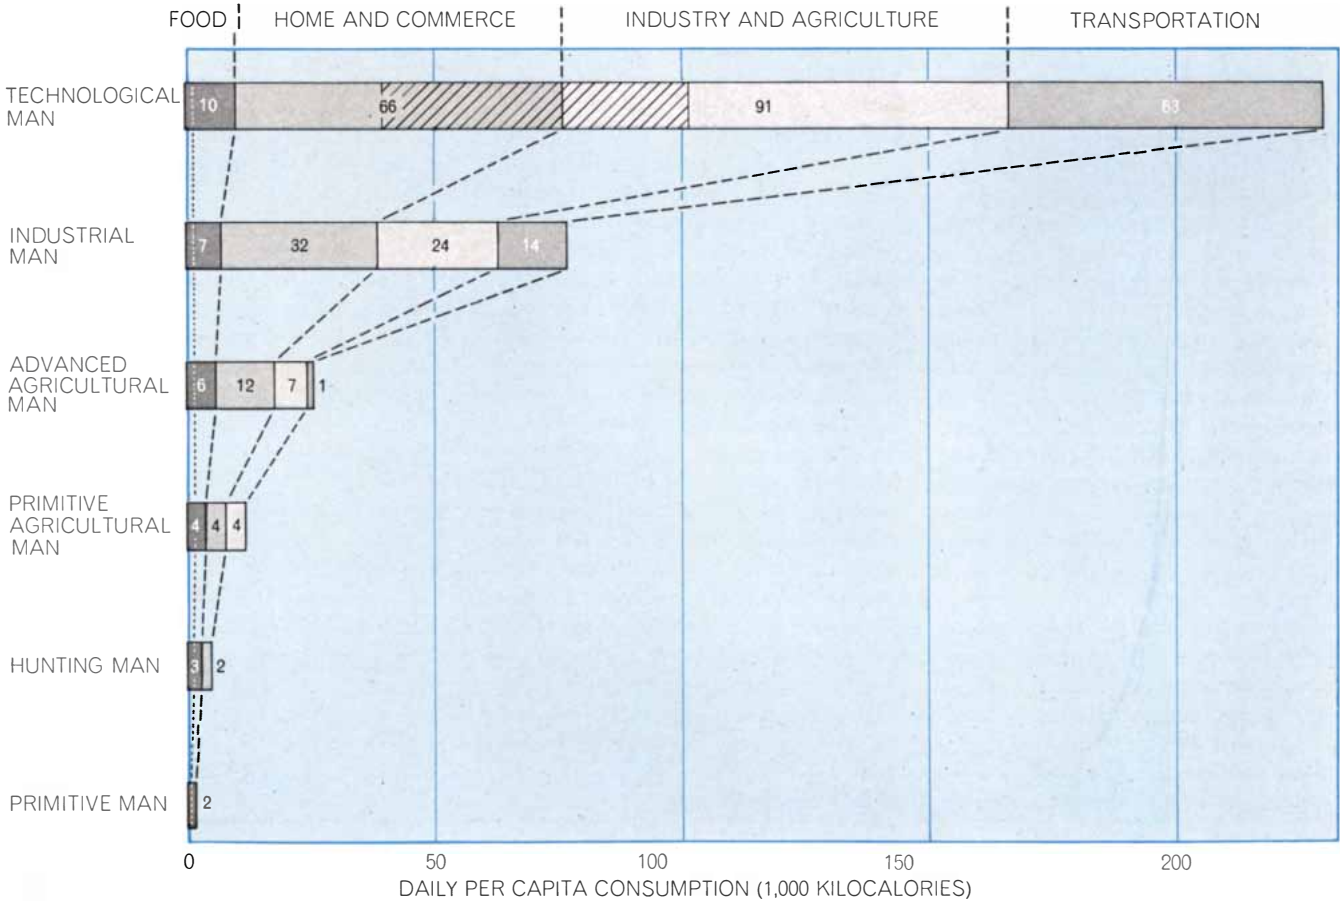


DAILY CONSUMPTION of energy per capita was calculated by the author for six stages in human development (and with an accuracy that decreases with antiquity). Primitive man (East Africa about 1,000,000 years ago) without the use of fire had only the energy of the food he ate. Hunting man (Europe about 100,000 years ago) had more food and also burned wood for heat and cooking. Primitive agricultural man (Fertile Crescent in 5000 B.C.) was grow-

ing crops and had gained animal energy. Advanced agricultural man (northwestern Europe in A.D. 1400) had some coal for heating, some water power and wind power and animal transport. Industrial man (in England in 1875) had the steam engine. In 1970 technological man (in the U.S.) consumed 230,000 kilocalories per day, much of it in form of electricity (hatched area). Food is divided into plant foods (far left) and animal foods (or foods fed to animals).


els man. Gross food-plant consumption might therefore be considered another component of gross energy consumption; it would add about 3×10^{15} B.t.u. to the input side of the energy-flow scheme. Of the 10,000 kilocalories per capita per day of gross production, handling and processing waste 15 percent. Of the remaining 8,500 kilocalories, some 6,300 go to feed animals that produce about 900 kilocalories of meat and 2,200 go into the human diet as plant materials, for a final food supply of about 3,100 kilocalories per person. Thus from field to table the efficiency of the food-energy system is 31 percent, close to the efficiency of a central power station. The similarity is not fortuitous; in both systems there is a large and unavoidable loss in the conversion of energy from a less desired form to a more desired one.

Let us consider recent changes in U.S. energy flow in more detail by seeing how the rates of increase in various sectors compare. Not only has energy consumption for electric-power generation been growing faster than the other sectors but also its growth rate has been increasing: from 7 percent per year in 1961–1965 to 8.6 percent per year in 1965–1969 to 9.25 percent last year [see top illustration on page 140]. The energy consumed in industry and commerce and in homes has increased at a fairly steady rate for a decade, but the energy demand of transportation has risen more sharply since 1966. All in all, energy consumption has been increasing lately at a rate of 5 percent per year, or four times faster than the increase in the U.S. population. Meanwhile the growth of the gross national product has tended to fall off, paralleling the rise in energy sectors other than fast-growing transportation and electricity. The result is a change in the ratio of total energy consumption to G.N.P. [see bottom illustration on page 140]. The ratio had been in a long general decline since 1920 (with brief reversals) but since 1967 it has risen more steeply each year. In 1970 the U.S. consumed more energy for each dollar of goods and services than at any time since 1951.

Electricity accounts for much of this decrease in economic efficiency, for several reasons. For one thing, we are substituting electricity, with a thermal efficiency of perhaps 32 percent, for many direct fuel uses with efficiencies ranging from 60 to 90 percent. Moreover, the fastest-growing segment of end-use consumption has been electric air conditioning. From 1967 to 1970 consumption for

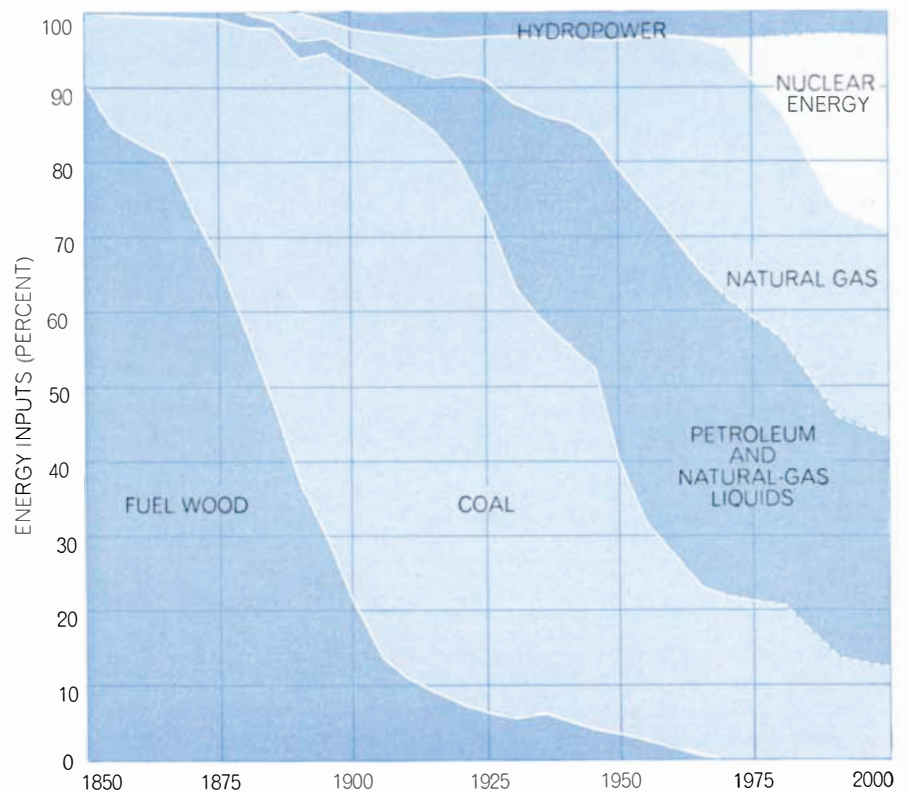

FOSSIL FUELS now account for nearly all the energy input into the U.S. economy. Coal's contribution has decreased since World War II; that of natural gas has increased most in that period. Nuclear energy should contribute a substantial percent within the next 20 years.

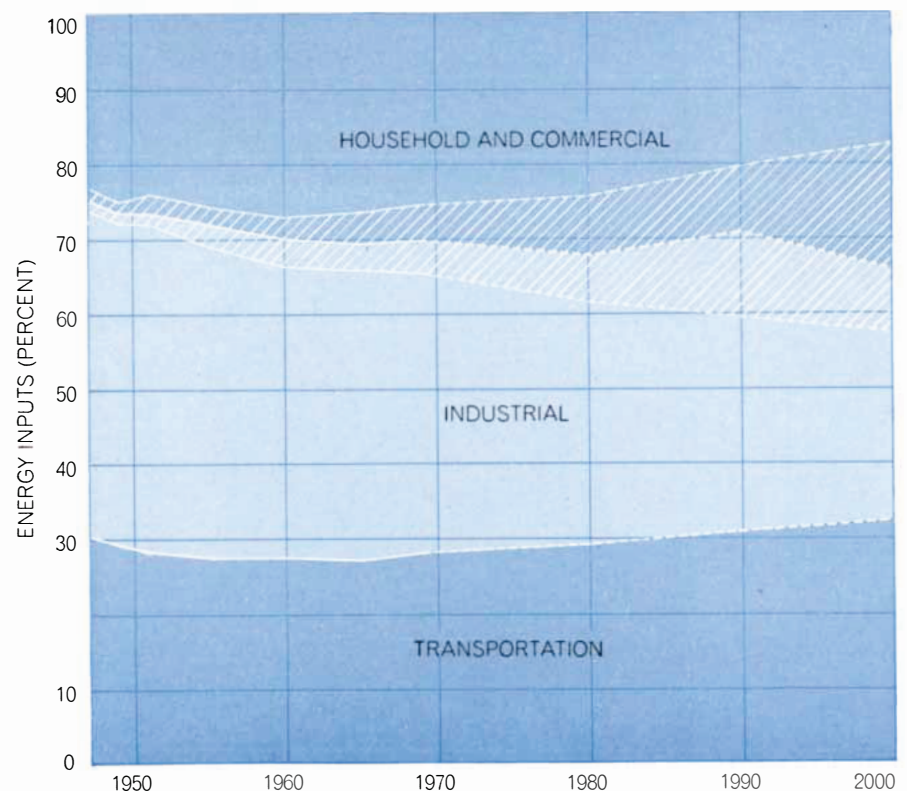

USEFUL WORK is distributed among the various end-use sectors of the U.S. economy as shown. The trend has been for industry's share to decrease, with household and commercial uses (including air conditioning) and transportation growing. Electricity accounts for an ever larger share of the work (hatched area). U.S. Bureau of Mines figures in this chart include nonenergy uses of fossil fuels, which constitute about 7 percent of total energy inputs.


air conditioning grew at the remarkable rate of 20 percent per year; it accounted for almost 16 percent of the total increase in electric-power generation from 1969 to 1970, with little or no multiplier effect on the G.N.P.

Let us take a look at this matter of efficiency in still another way: in terms of useful work done as a percentage of gross energy input. The "useful-work equivalent," or overall technical efficiency, is seen to be the product of the con-

version efficiency (if there is an intermediate conversion step) and the application efficiency of the machine or device that does the work [see bottom illustration on page 141]. Clearly there is a wide range of technical efficiencies in energy systems, depending on the conversion devices. It is often said that electrical resistance heating is 100 percent efficient, and indeed it is in terms, say, of converting electrical energy to thermal energy at the domestic hot-

water heater. In terms of the energy content of the natural gas or coal that fired the boiler that made the steam that drove the turbine that turned the generator that produced the electricity that heated the wires that warmed the water, however, it is not so efficient.

The technical efficiency of the total U.S. energy system, from potential energy at points of initial conversion to work at points of application, is about 50 percent. The economic efficiency of

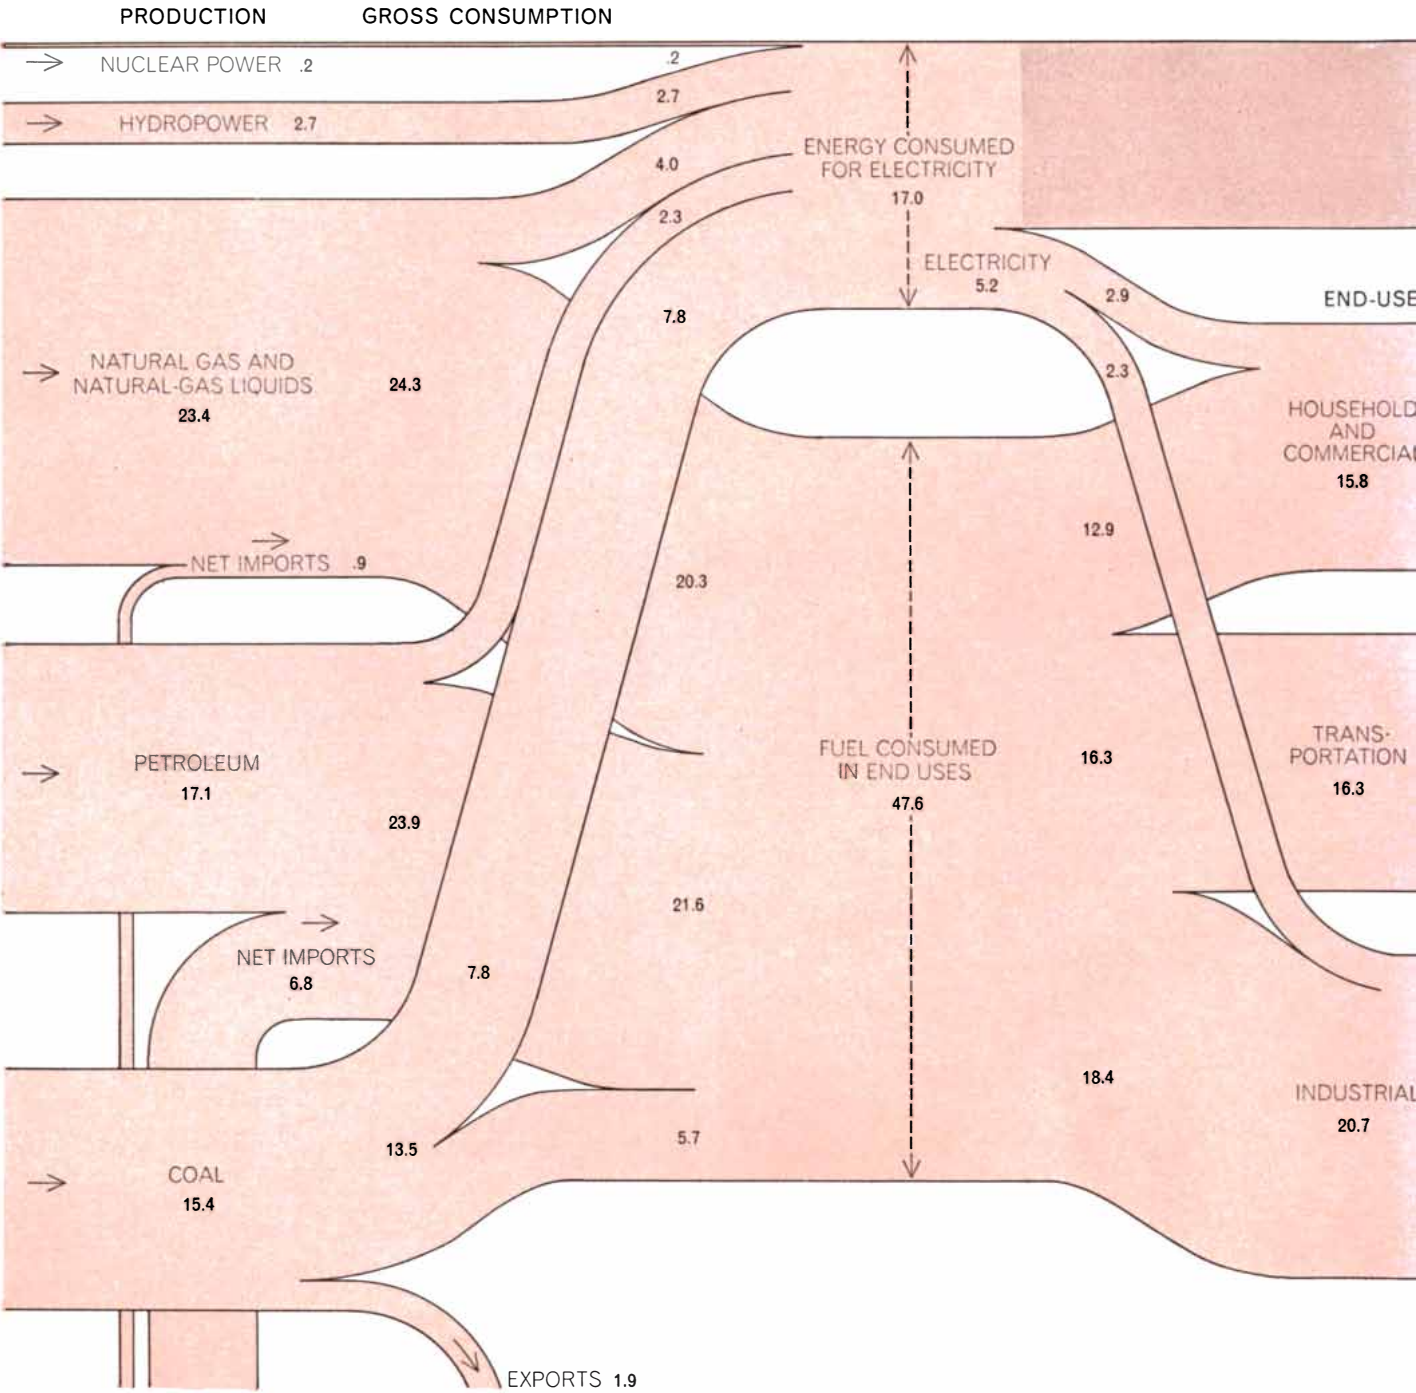

FLOW OF ENERGY through the U.S. system in 1970 is traced from production of energy commodities (left) to the ultimate conversion of energy into work for various industrial end products and waste heat (right). Total consumption of energy in 1970 was

64.6×10^{15} British thermal units. (Adding nonenergy uses of fossil fuels, primarily for petrochemicals, would raise the total to 68.8×10^{15} B.t.u.) The overall efficiency of the system was about 51 percent. Some of the fossil-fuel energy is consumed directly and

the system is considerably less. That is because work is expended in extracting, refining and transporting fuels, in the construction and operation of conversion facilities, power equipment and electricity-distribution networks, and in handling waste products and protecting the environment.

An industrial society requires not only a large supply of energy but also a high use of energy per capita, and the


society's economy and standard of living are shaped by interrelations among resources, population, the efficiency of conversion processes and the particular applications of power. The effect of these interrelations is illustrated by a comparison of per capita energy consumption and per capita output for a number of countries [see illustration on page 142]. As one might expect, there is a strong general correlation between the two measures, but it is far from be-

ing a one-to-one correlation. Some countries (the U.S.S.R. and the Republic of South Africa, for example) have a high energy consumption with respect to G.N.P.; other countries (such as Sweden and New Zealand) have a high output with relatively less energy consumption. Such differences reflect contrasting combinations of energy-intensive heavy industry and light consumer-oriented and service industries (characteristic of different stages of economic development) as well as differences in the efficiency of energy use. For example, countries that still rely on coal for a large part of their energy requirement have higher energy inputs per unit of production than those that use mainly petroleum and natural gas.


A look at trends from the U.S. past is also instructive. Between 1800 and 1880 total energy consumption in the U.S. lagged behind the population increase, which means that per capita energy consumption actually declined somewhat. On the other hand, the American standard of living increased during this period because the energy supply in 1880 (largely in the form of coal) was being used much more efficiently than the energy supply in 1800 (largely in the form of wood). From 1900 to 1920 there was a tremendous surge in the use of energy by Americans but not a parallel increase in the standard of living. The ratio of energy consumption to G.N.P. increased 50 percent during these two decades because electric power, inherently less efficient, began being substituted for the direct use of fuels; because the automobile, at best 25 percent efficient, proliferated (from 8,000 in 1900 to 8,132,000 in 1920), and because mining and manufacturing, which are energy-intensive, grew at very high rates during this period.

Then there began a long period during which increases in the efficiency of energy conversion and utilization fulfilled about two-thirds of the total increase in demand, so that the ratio of energy consumption to G.N.P. fell to about 60 percent of its 1920 peak although per capita energy consumption continued to increase. During this period (1920-1965) the efficiency of electric-power generation and transmission almost trebled, mining and manufacturing grew at much lower rates and the services sector of the economy, which is not energy-intensive, increased in importance.


"Power corrupts" was written of man's control over other men but it applies also to his control of energy re-

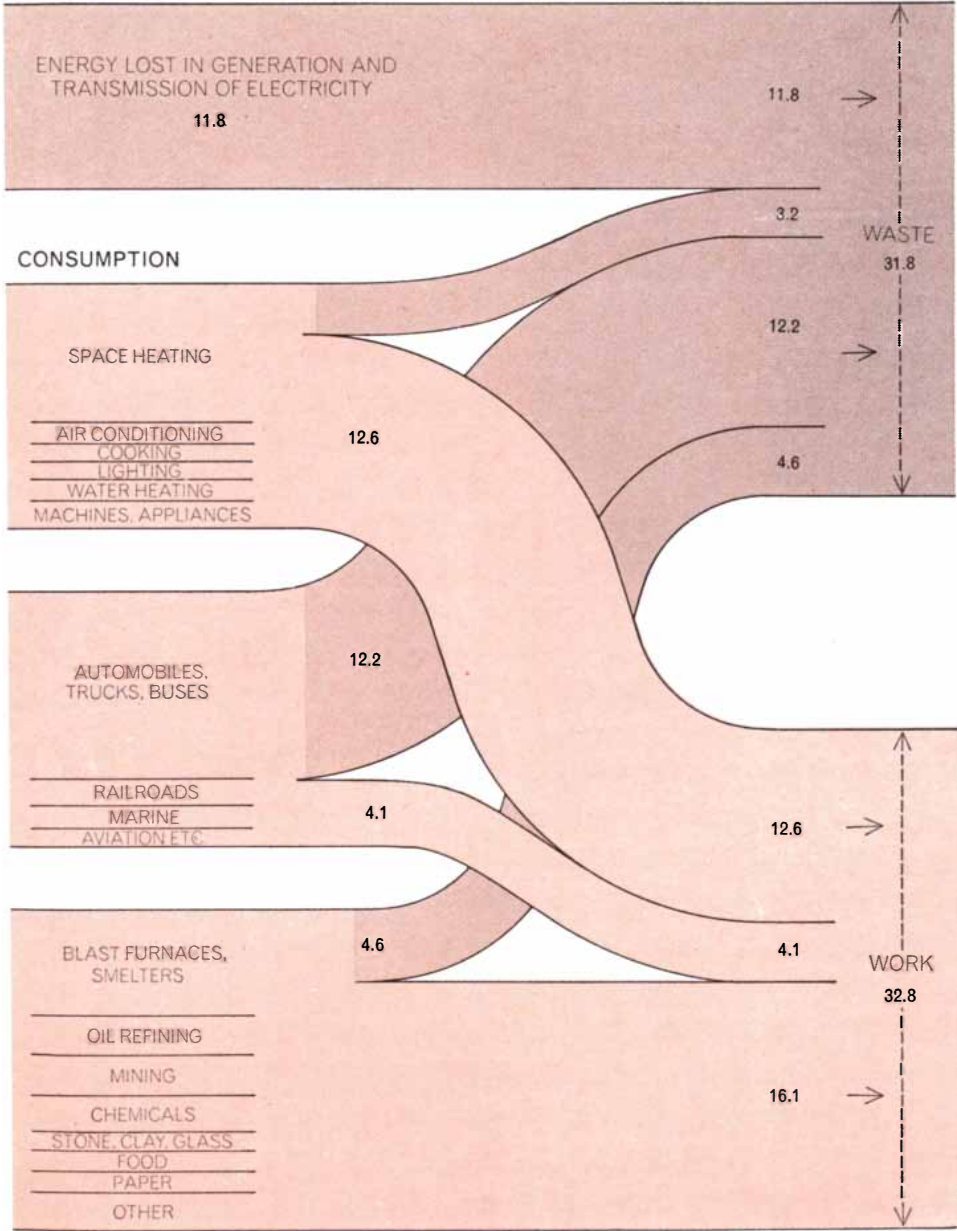

some is converted to generate electricity. The efficiency of electrical generation and transmission is taken to be about 31 percent, based on the ratio of utility electricity purchased in 1970 to the gross energy input for generation in that year. Efficiency of direct fuel use in transportation is taken as 25 percent, of fuel use in other applications as 75 percent.

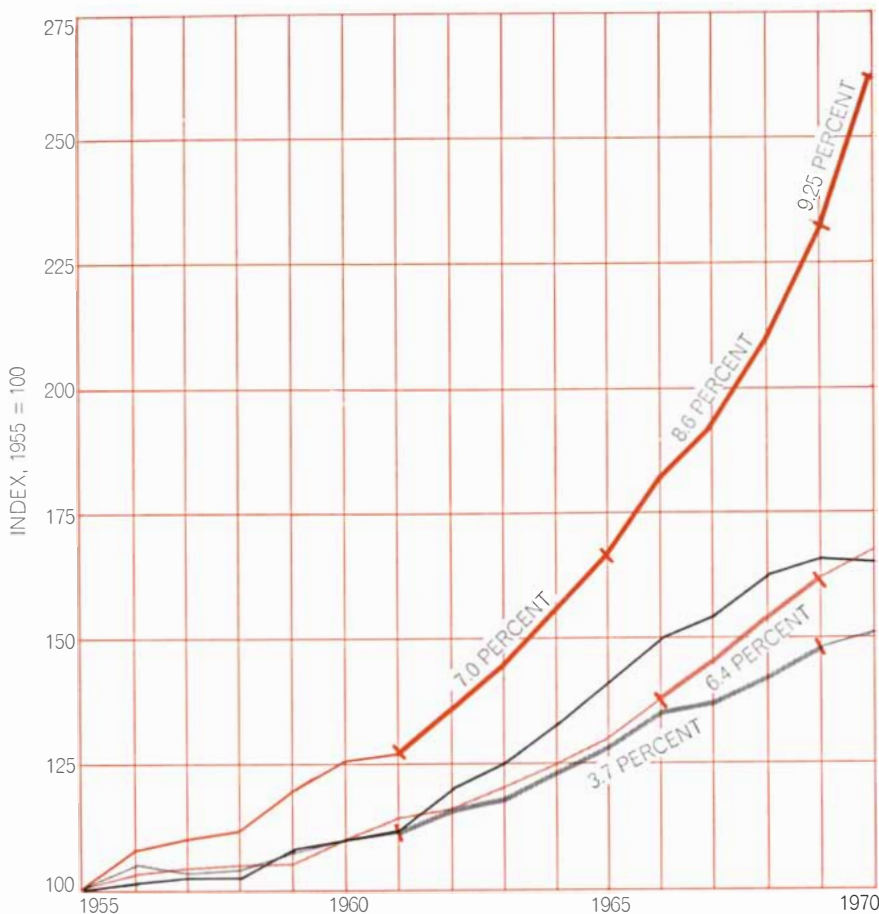

INCREASE IN CONSUMPTION of energy for electricity generation (dark color), transportation (light color) and other applications (gray) and of the gross national product (black) are compared. Annual growth rates for certain periods are shown beside heavy segments of curves. Consumption of electricity has a high growth rate and is increasing.

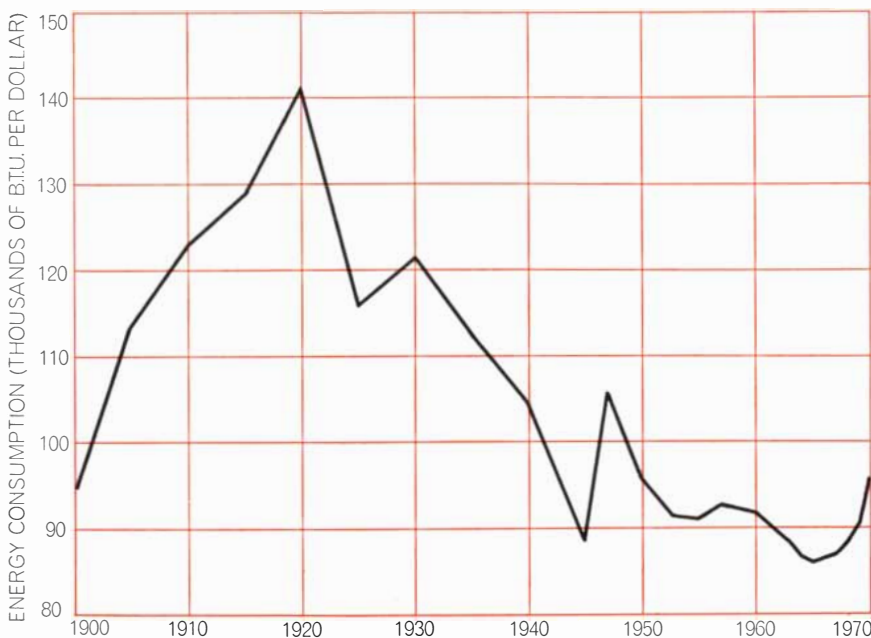


RATIO OF ENERGY CONSUMPTION to gross national product has varied over the years. It tends to be low when the G.N.P. is large and energy is being used efficiently, as was the case during World War II. The ratio has been rising steadily since 1965. Reasons include the increase in the use of air conditioning and the lack of advance in generating efficiency.

sources. The more power an industrial society disposes of, the more it wants. The more power we use, the more we shape our cities and mold our economic and social institutions to be dependent on the application of power and the consumption of energy. We could not now make any major move toward a lower per capita energy consumption without severe economic dislocation, and certainly the struggle of people in less developed regions toward somewhat similar energy-consumption levels cannot be thwarted without prolonging mass human suffering. Yet there is going to have to be some leveling off in the energy demands of industrial societies. Countries such as the U.S. have already come up against constraints dictated by the availability of resources and by damage to the environment. Another article in this issue considers the question of resource availability [see "The Energy Resources of the Earth," by M. King Hubbert, page 60]. Here I shall simply point out some of the decisions the U.S. faces in coping with diminishing supplies, and specifically with our increasing reliance on foreign sources of petroleum and petroleum products. In the short run the advantages of reasonable self-sufficiency must be weighed against the economic and environmental costs of developing oil reserves in Alaska and off the coast of California and the Gulf states. Later on such self-sufficiency may be attainable only through the production of oil from oil shale and from coal. In the long run the danger of dependence on dwindling fossil fuels—whatever they may be—must be balanced against the research and development costs of a major effort to shape a new energy system that is neither dependent on limited resources nor hard on the environment.

The environmental constraint may be more insistent than the constraint of resource availability. The present flow of energy through U.S. society leaves waste rock and acid water at coal mines; spilled oil from offshore wells and tankers; waste gases and particles from power plants, furnaces and automobiles; radioactive wastes of various kinds from nuclear-fuel processing plants and reactors. All along the line waste heat is developed, particularly at the power plants.

Yet for at least the next 50 years we shall be making use of dirty fuels: coal and petroleum. We can improve coal-combustion technology, we can build power plants at the mine mouth (so that the air of Appalachia is polluted instead of the air of New York City), we can make clean oil and gas from coal and oil

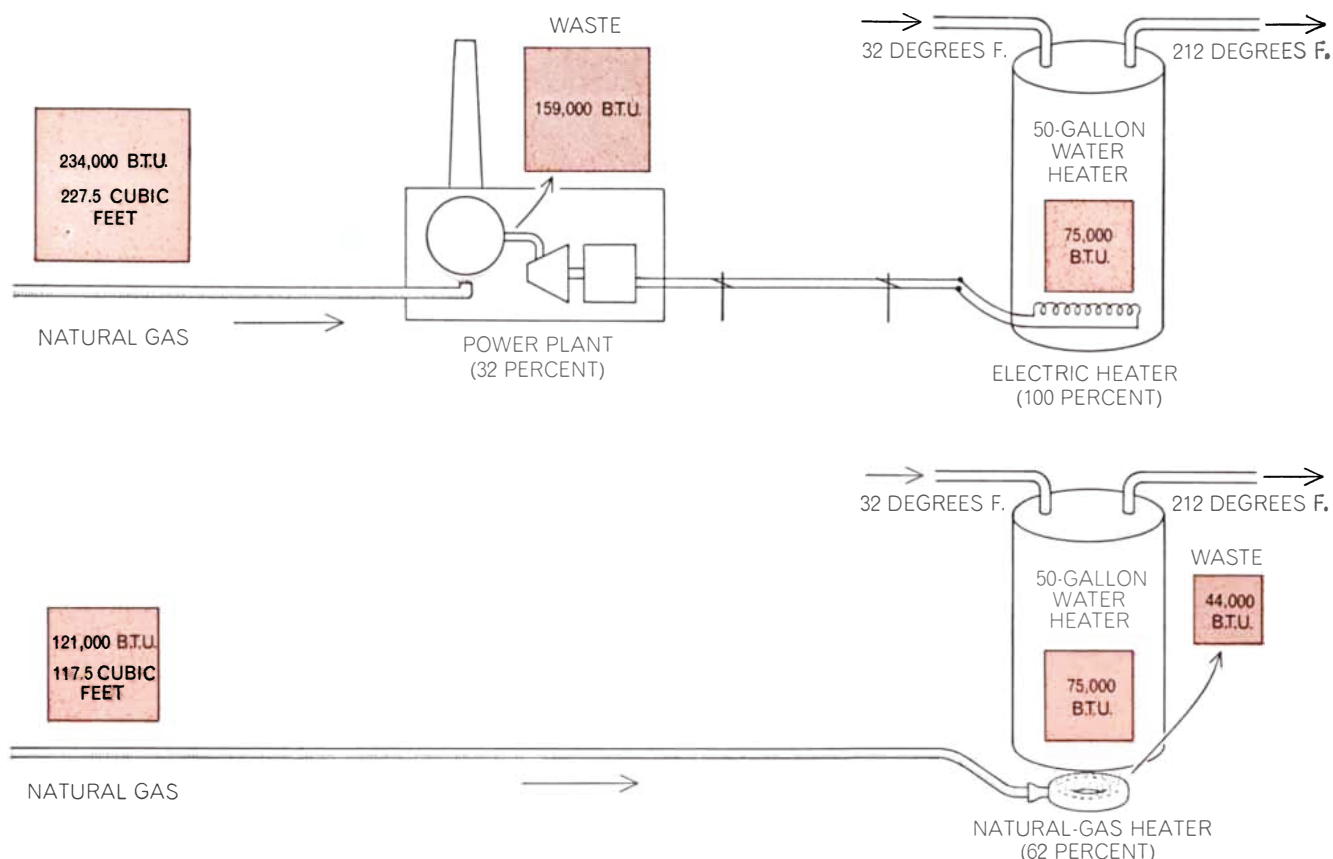

EFFICIENCIES OF HEATING WATER with natural gas indirectly by generating electricity for use in resistance heating (*top*) and directly (*bottom*) are contrasted. In each case the end result is

enough heat to warm 50 gallons of water from 32 degrees Fahrenheit to 212 degrees. Electrical method requires substantially more gas even though efficiency at electric heater is nearly 100 percent.

from shale, and sow grass on the mountains of waste. As nuclear power plants proliferate we can put them underground, or far from the cities they serve if we are willing to pay the cost in transmission losses. With adequate foresight, caution and research we may even be able to handle the radioactive-waste problem without "undue" risk.

There are, however, definite limits to

such improvements. The automobile engine and its present fuel simply cannot be cleaned up sufficiently to make it an acceptable urban citizen. It seems clear that the internal-combustion engine will be banned from the central city by the year 2000; it should probably be banned right now. Because our cities are shaped for automobiles, not for mass transit, we shall have to develop battery-powered

or flywheel-powered cars and taxis for inner-city transport. The 1970 census for the first time showed more metropolitan citizens living in suburbs than in the central city; it also showed a record high in automobiles per capita, with the greatest concentration in the suburbs. It seems reasonable to visualize the suburban two-car garage of the future with one car a recharger for "downtown" and

	PRIMARY ENERGY INPUT (UNITS)	SECONDARY ENERGY OUTPUT (UNITS)	APPLICATION EFFICIENCY (PERCENT)	TECHNICAL EFFICIENCY (PERCENT)
AUTOMOBILE				
INTERNAL-COMBUSTION ENGINE	100		25	25
FLYWHEEL DRIVE CHARGED BY ELECTRICITY	100	32	100	32
SPACE HEATING				
BY DIRECT FUEL USE	100		75	75
BY ELECTRICAL RESISTANCE	100	32	100	32
SMELTING OF STEEL				
WITH COKE	100	94	94	70
WITH ELECTRICITY	100	32	32	32

TECHNICAL EFFICIENCY is the product of conversion efficiency at an intermediate step (if there is one) and application efficiency at the device that does the work. Losses due to friction and heat are

ignored in the flywheel-drive automobile data. Coke retains only about 66 percent of the energy of coal, but the energy recovered from the by-products raises the energy conservation to 94 percent.

the other, still gasoline-powered, for suburban and cross-country driving.


Of course, some of the improvement in urban air quality bought by excluding the internal-combustion engine must be paid for by increased pollution from the power plant that supplies the electricity for the nightly recharging of the downtown vehicles. It need not, however, be paid for by an increased draft on the primary energy source; this is one substitution in which electricity need not decrease the technical efficiency of the system. The introduction of heat pumps for space heating and cooling would be

another. In fact, the overall efficiency should be somewhat improved and the environmental impact, given adequate attention to the siting, design and operation of the substituting power plant, should be greatly alleviated.

If technology can extend resource availability and keep environmental deterioration within acceptable limits in most respects, the specific environmental problem of waste heat may become the overriding one of the energy system by the turn of the century.


The cooling water required by power

plants already constitutes 10 percent of the total U.S. streamflow. The figure will increase sharply as more nuclear plants start up, since present designs of nuclear plants require 50 percent more cooling water than fossil-fueled plants of equal size do. The water is heated 15 degrees Fahrenheit or more as it flows through the plant. For ecological reasons such an increase in water released to a river, lake or ocean bay is unacceptable, at least for large quantities of effluent, and most large plants are now being built with cooling ponds or towers from which much of the heat of the water is dissi-

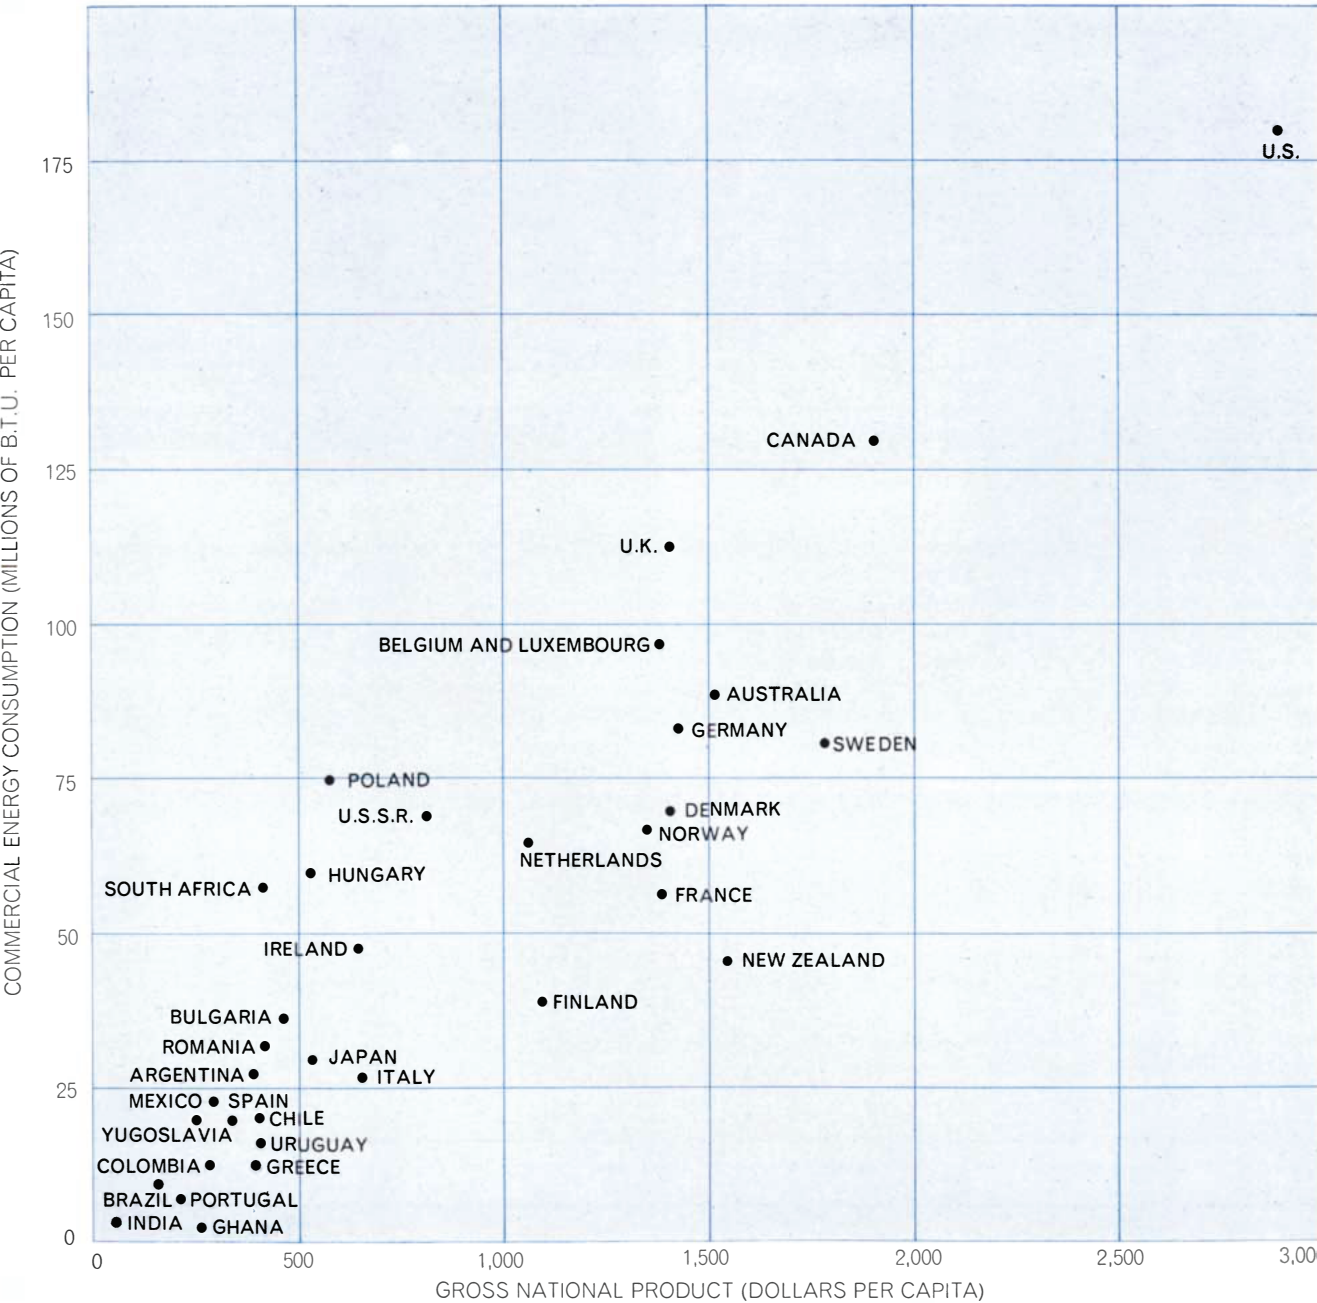

ROUGH CORRELATION between per capita consumption of energy and gross national product is seen when the two are plotted together; in general, high per capita energy consumption is a pre-requisite for high output of goods and services. If the position

plotted for the U.S. is considered to establish an arbitrary "line," some countries fall above or below that line. This appears to be related to a country's economic level, its emphasis on heavy industry or on services and its efficiency in converting energy into work.

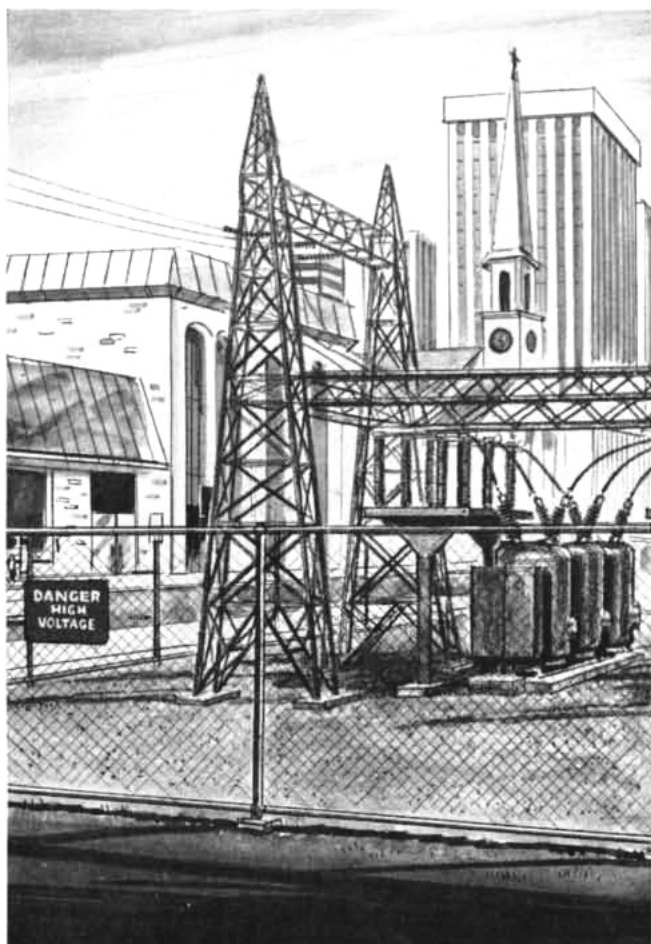

Now you see it... Now you don't.

I-T-E Imperial is doing powerful things for you.

For instance . . . our SF₆ gas-insulated systems have opened the way to a new era in out-of-sight high-voltage power lines and switching stations—improving environmental aesthetics. And just in time . . .

Within the present decade, it is estimated electric utilities will more than double their present generating and transmission capacities. So they have problems. Fortunately, our new gas-insulated systems offer many solutions.

This new concept shrinks utility high-voltage switching stations up to 1/15th their present size—and they can be indoors, outdoors, or even underground. This is an important economic consideration as prime land grows ever more scarce and property values sky-rocket. Inner-city land can cost up to millions of dollars an acre!

Also, where space and siting considerations do not permit the use of conventional overhead systems with their necessary towers, exposed conductors and wide right-of-way, I-T-E totally enclosed SF₆ electrical transmission

systems can be put completely out of sight—underground, in tunnels, or under elevated highways. For example, a 3-phase, 345kV, 2000 megawatt system is now being installed in an 8 ft. trench. Overhead installations ordinarily require up to 150' right of way!

In brief, by meeting the growing power need with new efficiency, we can help to achieve greater harmony with our total environment.

The first 345kV SF₆ insulated system, supplied by I-T-E was put "on line" July 4th—the first of its kind in the world—and other projects are now under construction. Also underway, a feasibility study of underwater transmission lines for off-shore power stations.

We've been working in electrical distribution and power protection, serving America's power needs for nearly a century. If you would like more details, we've got a free book. For your copy, contact your local I-T-E sales office or write I-T-E Imperial Corporation, 1900 Hamilton Street, Philadelphia, Pa. 19130.



I-T-E Imperial Corporation

BRAIN WAVE FEEDBACK

TRAIN • MEASURE • GROW • RESEARCH

TOOMIM ALPHA PACER

- Calibrated threshold control: 10-100 μ V
 - Calibrated frequency pacer: 6-13 Hz
 - Unobtrusive, easily applied headband
 - Audio feedback
 - Outputs for recording instruments
 - Pocket size: 9 oz.
 - Internal standard*
 - Gallium Arsenide light feedback*
 - Morocco leather case*
- \$195-\$255* - \$275** - \$295**

AMPLITUDE/FREQUENCY METER

- Quantities amplitude and frequency changes often associated with changes in feelings and attitudes.
- Invaluable for research, class demonstration, personal growth.
- Frequency range: 4-16 Hz
- Amplitude range: 0-60 μ V

THE ALPHA RHYTHM:


ITS MEANING

AND APPLICATION,

by Marjorie Kavin-Toomim, Ph.D.
• Literature review free on request

TOOMIM BIO-FEEDBACK LABORATORIES

Precision Instruments
10480 Santa Monica Blvd. Dept. S-2
Los Angeles, Ca. 90025
(213) 474-4171
41 West 71st Street—#6B
New York, New York 10023
(212) 799-8171

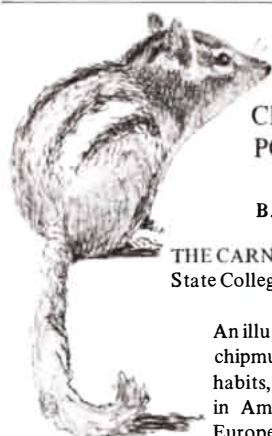

CHIPMUNK PORTRAIT

by

B. & H. Henisch

THE CARNATION PRESS
State College, Pennsylvania

An illustrated study of chipmunks and their habits, their discovery in America by early European explorers, and their role in the art of the American Indian. 'Delightful, scholarly' (Scientific American). 'One of 1970's outstanding titles; impossible to by-pass' (Library Journal). 'A certified delight' (House Beautiful).

Cloth bound, 98 pages, with 45 close-up photographs and 28 pen-and-wash drawings, \$5.95 plus 25¢ handling. (Pa. residents add 36¢ sales tax.)

To the CARNATION PRESS, Dept. BS,
P.O. Box 101, State College, Pa. 16801

Please supply copies of CHIPMUNK PORTRAIT

Amount enclosed: \$

Name

Street

City State Zip


pated to the atmosphere before the water is discharged or recycled through the plant. Although the atmosphere is a more capacious sink for waste heat than any body of water, even this disposal mechanism obviously has its environmental limits.

Many suggestions have been made for putting the waste heat from power plants to work: for irrigation or aquaculture, to provide ice-free shipping lanes or for space heating. (The waste heat from power generation today would be more than enough to heat every home in the U.S.!) Unfortunately the quantities of water involved, the relatively low temperature of the coolant water and the distances between power plants and areas of potential use are serious deterrents to the utilization of waste heat. Plants can be designed, however, for both power production and space heating. Such a plant has been in operation in Berlin for a number of years and has proved to be more efficient than a combination of separate systems for power production and space heating. The Berlin plant is not simply a conservator of waste heat but an exercise in fuel economy; its power capacity was reduced in order to raise the temperature of the heated water above that of normal cooling water.

With present and foreseeable technology there is not much hope of decreasing the amount of heat rejected to

streams or the atmosphere (or both) from central steam-generating power plants. Two systems of producing power without steam generation offer some long-range hope of alleviating the waste-heat problem. One is the fuel cell; the other is the fusion reactor combined with a system for converting the energy released directly into electricity [see "The Conversion of Energy," by Claude M. Summers, page 148]. In the fuel cell the energy contained in hydrocarbons or hydrogen is released by a controlled oxidation process that produces electricity directly with an efficiency of about 60 percent. A practical fusion reactor with a direct-conversion system is not likely to appear in this century.

Major changes in power technology will be required to reduce pollution and manage wastes, to improve the efficiency of the system and to remove the resource-availability constraint. Making the changes will call for hard political decisions. Energy needs will have to be weighed against environmental and social costs; a decision to set a pollution standard or to ban the internal-combustion engine or to finance nuclear-power development can have major economic and political effects. Democratic societies are not noted for their ability to take the long view in making decisions. Yet indefinite growth in energy consumption, as in human population, is simply not possible.

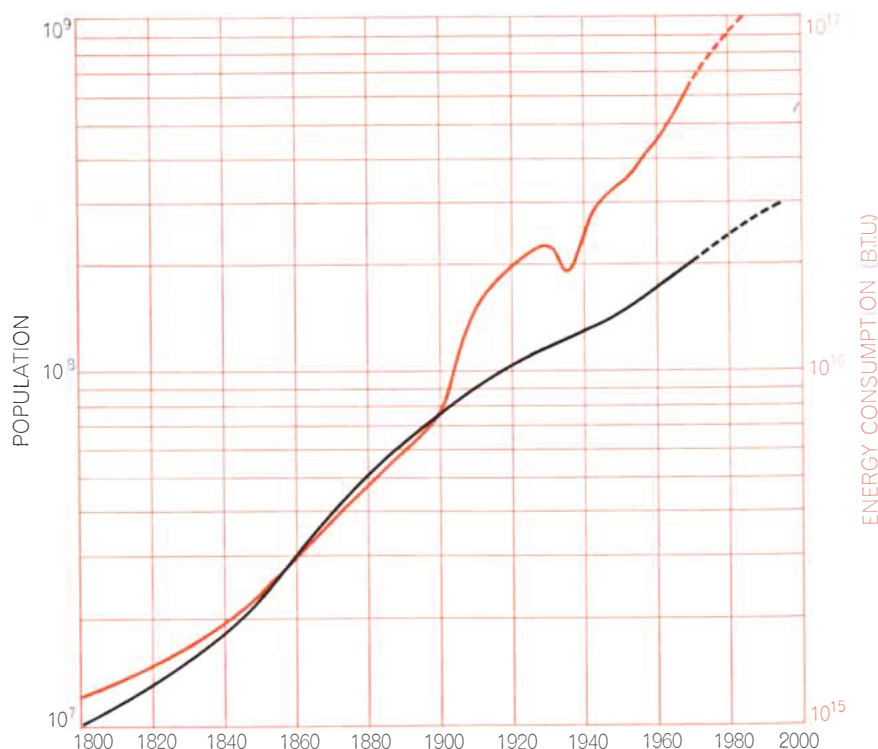

U.S. ENERGY-CONSUMPTION GROWTH (curve in color) has outpaced the growth in population (black) since 1900, except during the energy cutback of the depression years.



Taken for granted

153 136 VI

But it doesn't just happen

Electricity is twinkling lights. Electricity is downtown streetcars. Chandeliers at the opera, the spots and floods. Electricity cooks late suppers. Lets you watch that late show. Keeps you warm, or cool.

Electricity turns the wheels of industry. Helping to make things. From space-craft to bread.

Electricity means safety. In the hospital. At the airport. Electricity is essential.

But it doesn't just happen. It has to be generated. More and more, for more and more purposes. Work on hand with the Brown Boveri Group just now includes 10 very large turbine-generator sets over 1000 MW for the United States. Six of them the biggest in the world. Together they

will produce 12 750 000 kW, day in, day out. They will be well designed, reliable machines. It's taken for granted.

BBC
BROWN BOVERI

Represented in the USA by
Brown Boveri Corporation,
North Brunswick, N.J.

What is U.S. Steel doing to



expand man's knowledge?



MOON ROCK BROUGHT BACK BY APOLLO 12.

Studying the moon rocks is one of the things we're doing.

U.S. Steel is involved in this exciting NASA program because we have a remarkable instrument at our

research center near Pittsburgh—a million-volt electron microscope, the largest in the Western Hemisphere. A microscope so powerful it can resolve features eight billionths of an inch apart.

Our metallurgists, physicists and chemists are probing the moon samples almost atom by atom. Just as we've used it to probe the



U.S. STEEL SCIENTIST AT MICROSCOPE CONSOLE.



LUNAR SAMPLE UNDER POLARIZED LIGHT.

nature of our steels. And to study tooth enamel, vaccines, muscle tissue and much more. We're helping to unlock the secrets of the moon as well as of earth.

Because man can improve his life by expanding his knowledge, at United States Steel, we're involved.

USS is a registered trademark.

We're involved.



THESE ACCELERATORS POWER U.S. STEEL'S MILLION-VOLT ELECTRON MICROSCOPE.